

ROSBACK COMPANY

Manufacturers of Quality Handcrafted Bindery & Finishing Equipment since 1881

Model 880 & 882 Glue Pot Wire Routing Instructions


This sheet describes the steps required to replace the glue pot music wire in Rosback Model 880 Perfect Binders.

WARNING!

DISCONNECT THE BINDER COMPLETELY FROM ITS POWER SOURCE BEFORE BEGINNING THIS OR ANY OTHER SERVICE PROCEDURE.

CAUTION!


TO AVOID SEVERE BURNS, WAIT UNTIL THE GLUE POT IS COOL TO THE TOUCH BEFORE BEGINNING THIS SERVICE PROCEDURE.

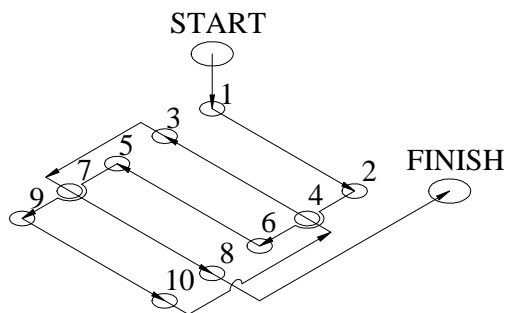

START

Up to hole #1 across to hole #2
Up to hole #6 across to hole #5
Up to hole #9 across to hole #10
Down to hole #4 across to hole #3
Up to hole #7 across to hole #8
Over to FINISH

Make clockwise loops for securing to screws. Wire must be tightly drawn.

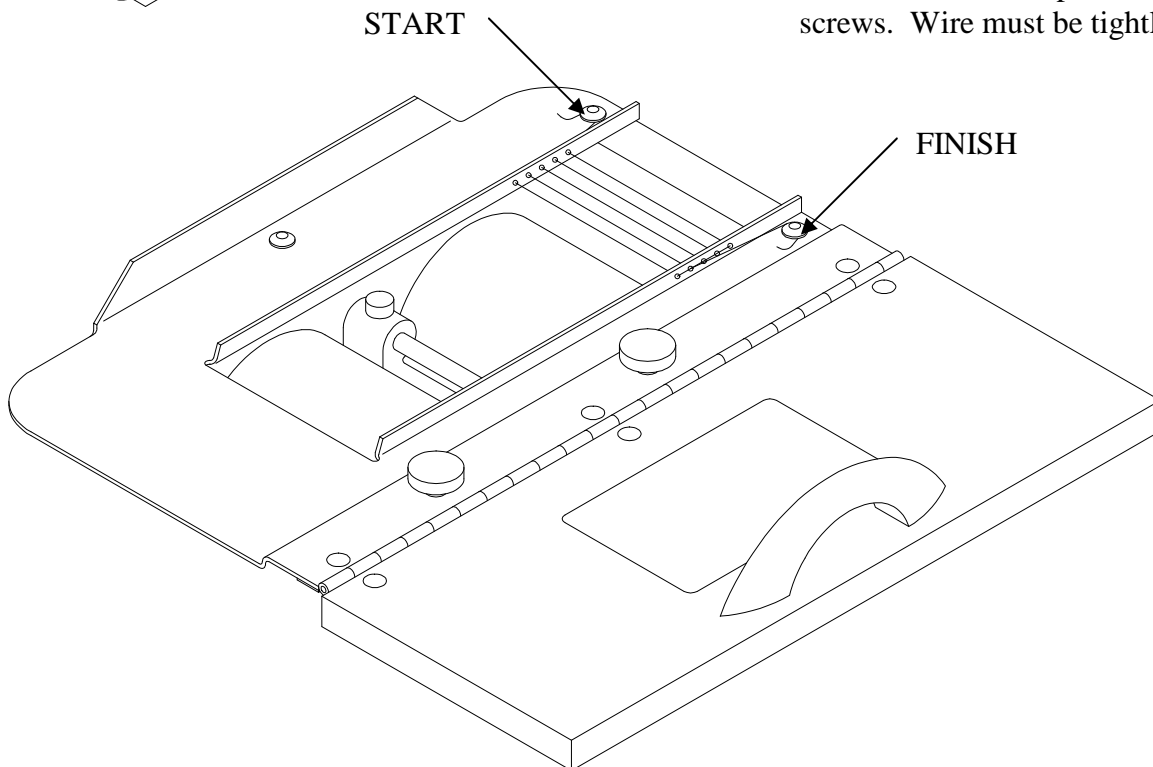

Shipping & Mailing Address: 125 Hawthorne Ave., St. Joseph, MI 49085

Phone: (269) 983-2582 * Fax: (269) 983-2516 * Internet: www.rosbackcompany.com * E-mail: Sales@RosbackCompany.com

Manufactured in the USA since 1881