

ROSBACK COMPANY

920 & 923 Conveyors



High Speed and Continuous Production

Performance & Finishing Features

Designed for runs of hundreds and thousands... built for thousands of runs.

The Rosback 920 and 923 Conveyors allow continuous production on Rosback Perforators by eliminating the need to stop and unload.

The 920 and 923 Conveyors roll up to the Rosback Perforators or other equipment and delivers "shingled" single sheets.


Deliver onto the 920 and 923 Conveyors from your Rosback Perforator to complete long runs even faster.

STATE-OF-THE-ART PERFORMANCE FEATURES:

- Run jobs much faster by reducing unloading time.
- Adjustable height above floor from 29.5" to 37" in 1.5" increments.
- Can be used inline with all 220,223,226 TrueLines, SR series, and 240 series Rosback Perforators.
- Variable speed DC controls.
- Greater stock capacity than the standard delivery table.
- Lockable swivel with brake casters for easy mobility.
- Simple and quick adjustment of conveyor tape and control wheel positions.
- Use up to 7 conveyor tapes and control wheels (3 tapes standard).
- Produce slitting without any center trim removal, no need for special delivery dividers.
- Fast accurate production of multiple printed sheets, no guillotining required.

STANDARD EQUIPMENT:

- Three Conveyor Tapes
- Three 4" Control Wheels
- Three 2" Control Wheels
- Three Sheet Deflectors

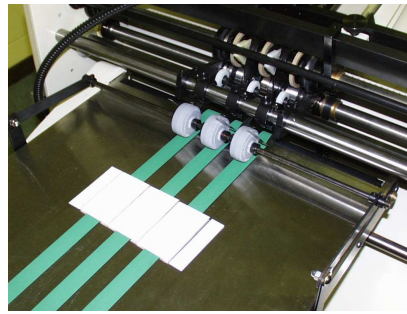

ROSBACK PERFORATOR AVAILABLE OPTIONS & ACCESSORIES:

- TrueScore Digital Score Head Series
- "CD" Inlay Heads
- Gutter Slitter/Perf Heads
- Knife-Cut /Slot Cut Perf Heads
- Micro-Perf Heads
- Slitting Heads
- Scoring Heads – Special Extra Wide
- Pressure-Sensitive Slitting Attachment
- Narrow Margin Perf Heads (3/8" From Sheet Edge)
- Special Slot-Perf Heads (1/2" Between Perf Lines)
- Special Engineered Heads Upon Request
- Jogger Delivery, (240 Series)
- Conveyor Delivery
- CE Guarding Package

| SPECIFICATIONS | | |
|-----------------------------|--|---------------|
| | Model 920 | Model 923 |
| Width | 20" | 26" (66.0 cm) |
| Length | 55 1/2" | |
| Height | 29 1/2" to 37" Adjustable in increments of 1 1/2" | |
| Weight | 86 lbs | |
| Shipping Weight | 266 lbs | |
| Standard Electrical Supply | 120 Vac, 60 Hz, 1Ph, 5 Amp (circuit breaker protected recommended) | |
| High Volt Electrical Supply | Optional 230 Vac, 50Hz, 1 Ph, 10 Amp (fused disconnect required) | |
| Surface Speed | Maximum 32 ft/min. Minimum 11 ft/min. | |

*Contact Rosback for alternate electrical requirements
Design Specifications Subject To Change Without Notice

ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA
Phone: (269) 983-2582 * Fax: (269) 983-2516
Internet: www.rosbackcompany.com * E-mail: sales@rosbackcompany.com