

Automatic Saddle Stitchers for Improving Binder Production

201CA & 201CB Saddle Stitchers

**ROSBACK**

### Performance & Finishing Features

Designed for runs of hundreds & thousands... built for thousands of runs.

Compared to a pedestal stitcher, a Rosback saddle stitcher is fully automatic, ideal for increased productivity and will get you up and running fast, and keep you running profitably.

Rosback stitchers offer two standard feeding stations and have the ability to expand to six stations as your customer demands increase.

Benefit from production rates that let you control job timing for maximum profit. Invest in the name trusted for over 120 years... ROSBACK.

### STATE-OF-THE-ART PERFORMANCE FEATURES:

- Rugged long life construction
- Conveniently located controls
- Stagger and straight stitching
- Variable speed drive
- Movable footswitch
- Missing Book Detector (201CB Models only)
- Up to 4 stitching heads can be used simultaneously
- Up to 6 feeding stations can be used simultaneously

### STANDARD EQUIPMENT:

- 2-Stitching Heads
- 2-Spools of Stitching Wire
- 1-Book Sensor (201CB only)
- 1-Tool Kit
- 1-Spare Parts Kit




Conveniently located and large visible controls.



Two-station saddle & feed fingers provide 4x greater productivity compared to pedestal stitchers.




Sensor on 201B Models detect missing signatures over saddle and prevents the stitching heads to stitch without a book present.



Up to 4 stitching heads can be used at one time. Easily adjustable and removable.




Positive delivery with single lever thickness adjustment of rollers assures positive book control throughout delivery.



Optional 213 Saddle Extension

### AVAILABLE OPTIONS & ACCESSORIES:

- Rear Feed Table
- Total Counter
- Flat Stitch Table
- Third, Fourth & Spare Stitching Heads
- Loop Stitching Heads
- Hohner Stitching Heads
- Saddle Extension (213)
- CE Guarding Package

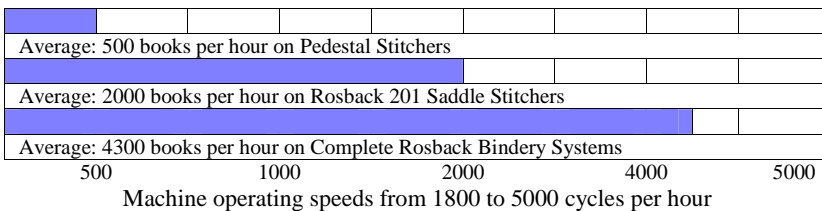

### Saddle Stitcher Specifications

<b>Booklet Sizes</b>	
Minimum	3-1/2" (8.9 cm) x 5" (12.7 cm)
Maximum	12" (30.5 cm) x 15" (38.1 cm)
Maximum Stitch Thickness	3/16" (4.75 mm) [creates 3/8" (9.5mm) book]
<b>Stitch Spacing (center to center)</b>	
Minimum	2-1/8" (5.4 cm)
Maximum	9-3/4" (24.7 cm)
<b>Dimensions</b>	
Length	84" (2.13 m)
Width	55" (1.40 m)
Height	49" (1.24 m)
<b>Weights</b>	
Net	700 lbs. (318 kg)
Shipping	900 lbs. (408 kg)
Export Shipping	1050 lbs. (476 kg)
<b>Electrical*</b>	
Standard	120 vac, 60 Hz, 1Ph, 5 amp fused
<b>Cycle Speed</b>	
Books per hour (bph)	1800 to 5000
Production rate	Average 2000 bph (depends on operators ability)

\*Contact Rosback for alternate electrical requirements.  
Design Specifications Subject To Change Without Notice.

### ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA  
 Phone: (269) 983-2582 \* Fax: (269) 983-2516  
 Internet: www.rosbackcompany.com \* E-mail: Sales@RosbackCompany.com

Your Dealer: