



240XL shown equipped with  
optional Jogger Delivery

## 240XL & 243XL SERIES PERFORATOR/SCORER/SLITTER

*Start XLeRating Your PROFITS Today!*

# ROSBACK

Performance & Finishing Features Designed for runs of hundreds and thousands... built for thousands of runs.

These versatile machines will produce intricate patterns such as perf, strike perf, score and slit combinations, difficult "CD" inlays and "J" cards, tickets, forms; etc. The capabilities are virtually unlimited. Designing and building perforators for over 120 years, Rosback perf, score and slit machines are known worldwide as the most accurate and dependable. *Start XLERating Your PROFITS Today!*

### STATE-OF-THE-ART PERFORMANCE FEATURES:

- Ball bearing construction for extended machine life
- Standard Easy-Out Shafts, dramatically reduces setup times when tooling changes are required
- Ergonomically located operating controls
- Speeds up to 24,000 feet/hr
- Load up to 30" wide stock with deep pile in-feed
- Consistent feeding with precise pile height control
- 100% accurate registration system including sheet deflectors and micrometer dial for angular adjustments
- Standard total & batch counter
- Double sheet detector
- Vacuum air-feed eliminates marking
- Separate vacuum and pressure units enhance performance
- Upgrade to a 243XL tandem (2) shaft unit for difficult score-on-score jobs, twice as many perforating or creasing heads, and virtually unlimited perforating and score patterns.

### ACCESSORIES:


- Quick-Align Perforating Heads
- TrueScore Digital Score Head Series
- "CD" Inlay Heads
- Cobra Strike Perf Heads
- Gutter Slitter/Perf Heads
- Knife-Cut Heads
- Micro-Perf Heads
- Narrow Margin Perf Heads (3/8" From Sheet Edge)
- Pressure-Sensitive Slitting Attachment
- Slitting Heads
- Special Slot-Perf Heads (1/2" Between Perf Lines)
- Delivery Options (Static, Jog or Convey)
- Cross Perf/Right Angle (Model 248)

### 240XL STANDARD EQUIPMENT:


- Ball Bearing Construction
- Easy-Out Shafts
- 1-Double Sheet Detector
- 1-Total & Batch Counter
- 2-Sets of Slot Perf Heads w/Burr Rollers
- 1-Set of Scoring & Creasing Heads
- 8-Perforating Blades
- 1-Tool Kit

### 243XL STANDARD EQUIPMENT:


- Ball Bearing Construction
- Easy-Out Shafts
- 1-Double Sheet Detector
- 1-Total & Batch Counter
- 4-Sets of Slot Perf Heads w/Burr Rollers
- 2-Sets of Scoring & Creasing Heads
- 8-Perforating Blades
- 1-Tool Kit



Total System Monitoring




Accurate Registration



Optional Strike Perforating



Optional Conveyor Delivery

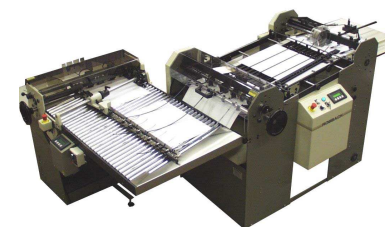

Optional 248 Right Angle

### XL SERIES VACUUM PILE-FEED PERFORATOR SPECS

Minimum Sheet Size	7-1/2" (19.1 cm) x 7-1/2" (19.1 cm)
Maximum Sheet Size	30" (76.2 cm) x 30" (76.2 cm)
Min space between lines of perf	3/4" (1.9 cm) Standard; 1/2" (1.3 cm) Avail
Min space between lines of score/crease	1/4" (6.4 mm) Standard
Cycle Speed	Up to 25,000 Feet per hour
Machine Dimensions 240XL	L: 108" (2.7m); W: 48" (1.2m) H: 47" (1.2m)
Machine Dimensions 243XL	L: 111" (2.8m); W: 48" (1.2m) H: 47" (1.2m)
Net Weight	240XL = 1204 lbs. (546 kg)   243XL = 1404 lbs. (637 kg)
Shipping Weight	240XL = 1684 lbs. (764 kg)   243XL = 1884 lbs. (854 kg)
Standard Input Power	230 vac 60 Hz 3Ph 30 amp Service Recommended

\*Contact Rosback for alternate electrical requirements  
Design Specifications Subject To Change Without Notice

### ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA  
Phone: (269) 983-2582 \* Fax: (269) 983-2516  
Internet: www.rosbackcompany.com \* E-mail: Sales@RosbackCompany.com

Your Dealer: