

Shown as 240XL  
with 248 Right Angle

## PERFORATORS/SCORERS/SLITTERS

248 & 249 Right Angle/Cross Units

*Versatile, In-Line or 90-Degree Operation*

# **ROSBACK**

The 248 Perforator/Scorer/Slitter reduces the time and extra handling in jobs previously requiring costly re-feeding or double passing.


This 30-inch Model 248 Cross Perf rolls up to other equipment (in-line or right angle) and accepts work from folders, collators, numbering machines, and other perforators.

Feed into the Model 248 from any Rosback perforating unit to complete right angle jobs perfectly and profitably.

Upgrade to a 249 tandem (2) shaft unit for difficult score-on-score jobs, twice as many perforating or creasing heads, and virtually unlimited perforating and score patterns.


### STATE-OF-THE-ART PERFORMANCE FEATURES:

- Heavy-duty 30-inch perf section
- Accurate side-bar registration
- Convenient operator control system
- Ball Bearing Construction
- Standard Easy-Out Shafts, dramatically reduces setup times when tooling changes are required
- Adjustable in-feed height
- Caster mounted for easy mobility
- Micro adjusted Side Guides
- Perf heads w/ built-in chip remover
- Strippers – comp. surround perf cutters
- Molded drive rollers
- See-through safety cover
- Quickly add or remove heads
- Run up to 20 heads
- Handles materials ranging from 9-lb. onionskin to 1/16" board

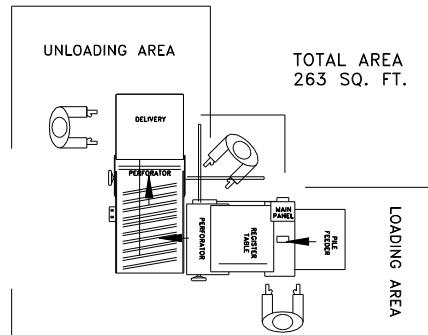

### 248 STANDARD EQUIPMENT:

- Ball Bearing Construction with Easy-Out Shafts
- 2-Set of Drive Rollers
- 2-Sets of Slot Perf Heads w/Burr Rollers
- 2-Set of Scoring/Creasing Heads
- 8-Perforating Blades
- 1-Set of Full Circle Shaft Supports
- 1-Tool Kit
- 1-Spare Parts Kit

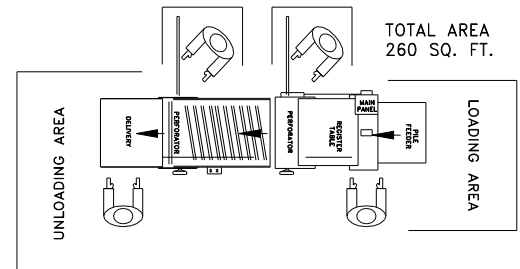

### AVAILABLE OPTIONS & ACCESSORIES:

- TrueScore Digital Score Head Series
- Pressure-Sensitive Slitting Attachment
- Narrow Margin Perf Heads (3/8" From Sheet Edge)
- Special Slot-Perf Heads (1/2" Between Perf Lines)
- Special Engineered Heads Upon Request
- Knife-Cut Heads
- Micro-Perf Heads
- Jogger Delivery
- Conveyor Delivery
- "CD" Inlay Heads
- Gutter Slitter/Perf Heads
- Slitting Heads
- Scoring Heads – Special Ex Wide
- CE Guarding Package

248 & 249 Specifications	
Minimum Sheet Size	7-1/2" (19 cm) x 7-1/2" (19 cm)
Maximum Sheet Size	30" (76 cm) x 30" (76 cm)
Min space between lines of perf	3/4" (1.9 cm) standard 1/2" (1.3 cm) available Unlimited for 249 Unit
Min space between lines of score/crease	1/4" (6.4 mm) Standard Unlimited for 249 Unit
Cycle Speed	Up to 24,000 feet per hour
Machine Dimensions 248	L: 89" (2.2m); W: 48" (1.1m) H: 47" (1.0m)
Machine Dimensions 249	L: 92" (2.3m); W: 42" (1.1m) H: 38" (1.0m)
Net Weight	248 = 760 lbs. (345 kg)      249 = 960 lbs. (435 kg)
Shipping Weight	248 = 910 lbs. (413 kg)      249 = 1120 lbs. (508 kg)
Standard Input Power*	120 vac, 60Hz, 1Ph, 10 amp

\*Contact Rosback for alternate electrical requirements  
Design Specifications Subject To Change Without Notice

## ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA  
Phone: (269) 983-2582 \* Fax: (269) 983-2516  
Internet: www.rosbackcompany.com \* E-mail: Sales@RosbackCompany.com

Your Dealer: