



Automatic Saddle Stitchers for Improving Binder Production

203F Saddle Stitcher

ROSBACK

Performance & Finishing Features Designed for runs of hundreds and thousands... built for thousands of runs.

Compared to a pedestal stitcher, a Rosback saddle stitcher is fully automatic, ideal for increased productivity and will get you up and running fast, and keep you running profitably.

Rosback stitchers offer two standard feeding stations and have the ability to expand to a full automation bindery system as your customer demands increase.

Benefit from production rates that let you control job timing for maximum profit. Invest in the name trusted for over 120 years... ROSBACK.

STATE-OF-THE-ART PERFORMANCE FEATURES:

- Compatible with Feeder & Trimmer
- Rugged long life construction
- Conveniently located controls
- Stagger and straight stitching
- Inverter variable speed drive helps with automated timing sequence.
- Movable footswitch
- Electro mechanical braking action
- Up to 4 stitching heads can be used simultaneously
- Up to 6 feeding stations can be used simultaneously




Conveniently located and large visible controls.



Two-station saddle & feed fingers provide 4x greater productivity compared to pedestal stitchers.



Sensor detects missing signatures over saddle and prevents stitching heads to stitch without a book present.




Up to 4 stitching heads can be used at one time. Easily adjustable and removable.



Positive delivery with single lever thickness adjustment of rollers assures positive book control throughout delivery.



Easy connection for additional feeder and trimmer for your increasing customer demands.

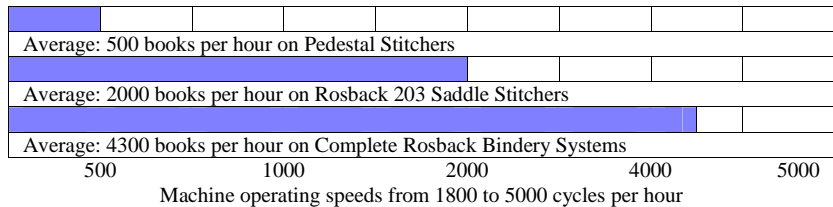

STANDARD EQUIPMENT:

- 2-Stitching Heads
- 2-Spools of Stitching Wire
- 1-Caliper Sensor
- 1-Book Sensor
- 1-Tool Kit
- 1-Spare Parts Kit



Stitcher within 318 Lynx System

AVAILABLE OPTIONS & ACCESSORIES:

- Rear Feed Table
- Total & Batch Counter
- Flat Stitch Table
- Third, Fourth & Spare Stitching Heads
- Loop Stitching Heads
- Hohner Stitching Heads
- Stitch-Tech Monitoring System (trimmer required)
- Saddle Extension (213)
- CE Guarding Package



Shown with 213 Saddle Extension



Stitcher within 203 Bindery System

Saddle Stitcher Specifications	
Booklet Sizes	
Minimum	3" (7.6 cm) x 5" (12.7 cm)
Maximum	12-1/2" (31.8 cm) x 15" (38.1cm)
Maximum Stitch Thickness	3/16" (4.75 mm) [creates 3/8" (9.5mm) book]
Stitch Spacing (center to center)	
Minimum	2-1/8" (5.4 cm)
Maximum	9-3/4" (24.7 cm)
Dimensions	
Length	84" (2.13 m)
Width	55" (1.40 m)
Height	49" (1.24 m)
Weights	
Net	900 lbs. (409 kg)
Shipping	1100 lbs. (499 kg)
Export Shipping	1325 lbs. (601 kg)
Electrical*	
Standard**	230 vac, 60 Hz, 3Ph, 30 amp
Cycle Speed	
Books per hour (bph)	1800 to 5000
Production rate	Up to 4300 (bph)

*Contact Rosback for alternate electrical requirements.

**If voltage is lower than 230 Volts, customer should provide a minimum of 0.750 KVA Buck & Boost transformer.

Design Specifications Subject To Change Without Notice.

ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA

Phone: (269) 983-2582 * Fax: (269) 983-2516

Internet: www.rosbackcompany.com * E-mail: Sales@RosbackCompany.com

Your Dealer: