

ROSBACK COMPANY

Booklet “Stack” Feeder Model 251




High Speed Three Knife Trimming Offline

- Continuous Loading Top Feeder
- Faster and more Accurate than a Paper Cutter
- Ideal for Perfect Bound or Stitched Books

The 251 Stack Feeder mounts to any Rosback Trimmer to provide a fast and accurate solution for offline 3-knife trimming. Feed and trim perfect bound or stitched booklets from 0.06" to 0.38" (1.5mm to 9.5mm) in thickness at speeds from 2000 to 5000 books per hour. Books are fed from the bottom of the stack using both a vacuum plate and mechanical pusher arms for heavier books. Continuous loading makes short work of any size run.

The 251 permanently mounts on the trimmer but is independently powered. The stack feeder can be disengaged so the trimmer can still be used inline with a Rosback bindery system or other booklet making system.

More accurate and much faster than using a cutter, the 251 Stack Feeder increases the versatility and profitability of your Rosback Trimmer.

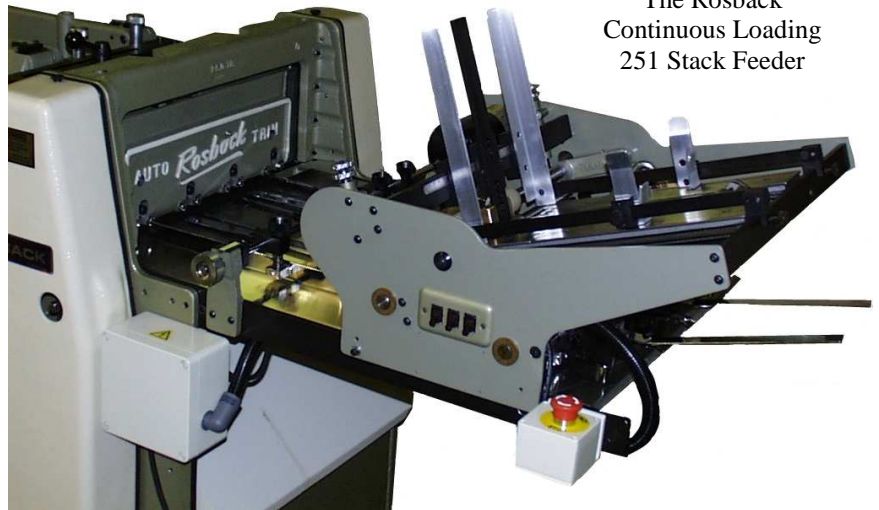

The Rosback Continuous Loading 251 Stack Feeder

251 Stack Feeder Features:

- Increased versatility of trimmer, feeds virtually any type of book.
- Faster trimming of books as compared to using a paper cutter – variable speed from 2000 to 5000 bph.
- Provides more accurate trimming on Perfect Bound or Flat Stitched books since books are trimmed individually.
- Can be used on any Rosback 3-knife Auto Trimmer.

MORE INLINE & OFFLINE 3-KNIFE TRIM SOLUTIONS:

- 250CB and 250XCB
- 252 Interface/Conveyor
- 953 ProFeeder
- 958 Auto Punch




318SA Trimmer and 252 Conveyor with any Tower Collating Unit



250CB & 250XB Trimmers with Roller Track In-Line Trim Solution



250CB Trimmer & 953 Feeder Off-Line Trim Solution



Rosback Trimmer & 958 Auto Punch

	250CB & 250XB	318SA
Max Untrimmed Book	12-1/2" (31.7 cm) x 16-1/2" (42 cm)	12-1/2" (31.7 cm) x 16-1/2" (42 cm)
Minimum Trim Book	4" (10.2 cm) x 7" (17.8 cm)	3-1/8" (8cm) x 5-13/16" (14.8cm)
Maximum Trim Book	11-1/2" (29.2 cm) x 15" (38.1 cm)	11-3/4" (29.8 cm) x 14" (35.5 cm)
Cycle Speed (*)	Up to 5000 for CB Up to 2580 for XB	1800 to 5000
Dims: Length	126" (320 cm)	110" (279.4 cm)
Height	48" (122 cm)	48" (122 cm)
Weights Net	2100 lbs. (953 kg)	2000 lbs. (907 kg)
Shipping	2300 lbs. (1043 kg)	2200 lbs. (998 kg)
Export	2500 lbs. (1134 kg)	2400 lbs. (1089 kg)

(*)Production speeds will vary with stock, operator and environmental conditions.
 Optional Electrics available upon request
 If voltage is lower than 230 Volts, customer should provide a minimum of 0.750 KVA Buck & Boost transformer.
 Design Specifications Subject To Change Without Notice

ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA
 Phone: (269) 983-2582 * Fax: (269) 983-2516
 Internet: www.rosbackcompany.com * E-mail: sales@rosbackcompany.com