

ROSBACK COMPANY

Universal Interface Model 252



Add Three Knife Trimming to any Booklet Maker

- **Interfaces with Rosback Three Knife Trimmers**
- **Improves Quality and Efficiency**
- **Accurate and Dependable**

The 252 Universal Interface is a conveyor unit designed to go between *any* tower stitch/fold unit and Rosback 250 or 318 Trimmers. The 252 Universal Interface accepts stitched and folded booklets inline from the tower collator finishing unit and moves the booklets in proper synchronized time to a Rosback 3-knife trimmer.

With 3-knife trimming, avoid the added time, cost and problems associated with guillotining books off-line. The result... perfectly trimmed books ready for your on-demand customers.

STATE-OF-THE-ART PERFORMANCE FEATURES:


- Accepts stitched and folded booklets inline from tower collators.
- Adds productivity to your existing booklet making with Rosback 3-knife trim quality finishing.
- Programmable controller that can be modified or expanded to meet your requirements.
- Solenoid controlled for perfect timing sequence to trimmer.
- Back-lit display with rate meter and book counter.
- Solid metal construction and mobile.
- Ball bearings on all rotating shafts.



Adjustable in-feed table accepts booklets from any stitch/fold unit.



Conveyor unit connects to Rosback 3-Knife Trimmers.

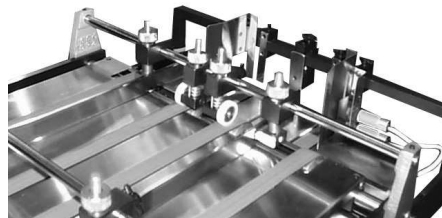

Booklets are collected into a hopper and inserted in proper synchronized time into Rosback 3-Knife Trimmers.



In-Line solutions shown with Rosback 3-Knife Trimmer.

252 Universal Interface Specifications	
Booklet Sizes	
Minimum	3.12" (7.9cm) x 4.5" (11.4cm)
Maximum	12.2" (31.0cm) x 16.5" (41.9cm)
Dimensions	
Length	60" (152.4cm)
Width	36" (91.4cm)
Height	45" (114 cm)
In-Feed Table Adjustment (From floor)	24in (61cm) to 48in (122cm)
Weights	
Net	260 lbs. (118kg)
Shipping	495 lbs. (225 kg)
Export	625 lbs. (284 kg)
Electrical	
Standard*	120 vac, 60Hz, 1Ph, 10 amp
Cycle Speed	
Books per hour	Variable up to 5000 cph

ROSBACK CO.

125 HAWTHORNE AVE., ST. JOSEPH, MI 49085 USA

Phone: (269) 983-2582 * Fax: (269) 983-2516

Internet: www.rosbackcompany.com * E-mail: sales@rosbackcompany.com